


Engine Powered Forklift 1.5 - 3.5 ton

BT cargo

C4D/G150T-180T

C4D/G200T-250T

C4D/G300T-350T



Engine Powered Forklift 1.5 - 1.75 ton

Truck specifications					C4G150T	C4D150T	C4G180T	C4D180T
Identification	1.1	Manufacturer			BT	BT	BT	BT
	1.2	Model			C4G150T	C4D150T	C4G180T	C4D180T
	1.3	Drive			LPG	Diesel	LPG	Diesel
	1.4	Operator type			Rider seated	Rider seated	Rider seated	Rider seated
	1.5	Load capacity/rated load	Q	kg	1500	1500	1750	1750
	1.6	Load centre	c	mm	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	421,5 ¹⁾	421,5 ¹⁾	421,5 ¹⁾	421,5 ¹⁾
	1.9	Wheelbase	y	mm	1485	1485	1485	1485
	Weight	2.1	Service weight		kg	2630	2730	2810
2.2		Axle load, with load, front/rear		kg	3750/560	3620/610	3930/630	4050/610
2.3		Axle load, without load, front/rear		kg	1150/1480	1200/1530	1110/1700	1230/1680
Tyres	3.1	Tyres: Cushion (C), Pneumatic (PN), Superelastic (SE), Dual (G)			SE-PN / SEG-PNG		SE-PN / SEG-PNG	
	3.2	Tyre size, front			6.50-10 / 6.00-9		6.50-10 / 6.00-9	
	3.3	Tyre size, rear			5.00-8		5.00-8	
	3.5	Wheels, number front/rear (x=driven wheels)			2x/2/ 4x/2		2x/2/ 4x/2	
	3.6	Track width, front	b ₁₀	mm	885/1085	885/1085	885/1085	885/1085
	3.7	Track width, rear	b ₁₁	mm	895	895	895	895
	Dimensions	4.1	Tilt of mast/fork carriage forward/backward		α/β	deg	6/11	6/11
4.2		Height, mast lowered		h ₁	mm	2065	2065	2065
4.3		Free lift		h ₂	mm	80	80	80
4.4		Lift		h ₃	mm	2970	2970	2970
		Lift height		h ₂₃	mm	3005	3005	3005
4.5		Height, mast extended		h ₄	mm	3525	3525	3525
4.7		Height of overhead guard (cab)		h ₆	mm	2080	2080	2080
4.8		Seat height/stand height		h ₇	mm	1030	1030	1030
4.12		Coupling height		h ₁₀	mm	285	285	285
4.19		Overall length		l ₁	mm	3342	3342	3342
4.20		Length to face of forks		l ₂	mm	2342	2342	2342
4.21		Overall width		b ₁	mm	1070/1430	1070/1430	1070/1430
4.22		Fork dimensions		s/e/l	mm	35/100/1000	35/100/1000	35/120/1000
4.23		Fork carriage DIN 15 173, class/type A, B				I/A	I/A	I/A
4.24		Fork-carriage width		b ₃	mm	920	920	920
4.31		Ground clearance, with load, below mast		m ₁	mm	115	115	115
4.32		Ground clearance, centre of wheelbase		m ₂	mm	130	130	130
4.33		Aisle width for pallets 1000 x 1200 crossways		A _{st}	mm	3695	3695	3695
4.34	Aisle width for pallets 800 x 1200 lengthways		A _{st}	mm	3895	3895	3895	
4.35	Turning radius		W _a	mm	2074	2074	2074	
4.36	Internal turning radius		b ₁₃	mm	575	575	575	
Performance data	5.1	Travel speed, with/without load			km/h	18,5/19,0	18,0/18,5	18,5/19,0
	5.2	Lift speed, with/without load			m/s	0,67/0,68	0,65/0,68	0,67/0,68
	5.3	Lowering speed, with/without load			m/s	< 0,55	< 0,55	< 0,55
	5.5	Drawbar pull, with/without load			N	17500/6300	16600/7000	17500/6300
	5.7	Gradeability, with/without load			%	45/22	45/22	44/20
	5.10	Service brake				Hydraulic	Hydraulic	Hydraulic
Combustion engine	7.1	Engine manufacturer/type				Toyota 4Y	Toyota 1DZ-III	Toyota 4Y
	7.2	Engine power acc. to ISO 1585			kW	38	36	38
	7.3	Rated speed			1/min	2570	2400	2570
	7.4	No. of cylinders/displacement			cm ³	4/2237	4/2486	4/2237
Others	8.1	Type of drive control				Hydrodynamic	Hydrodynamic	Hydrodynamic
	8.2	Operating pressure for attachments			bar	118	118	118
	8.3	Oil volume for attachments			l/min	65	64	65
	8.4	Sound level at the driver's ear according to EN 12 053			dB(A)	77	79	77

1) with sideshift: +35 mm

Performance data and dimensions are nominal and subject to tolerances.

Specifications are subject to change without notice.



Please obtain the latest specifications before contracting products.

Most dimensions and rated capacities

Model			Duplex NFL							Duplex FFL					Triplex FFL					
C4D/G150T C4D/G180T	Lift height	h_{23}	3005	3205	3705	4005	4205	4705	5005	3005	3205	3705	4005	4205	4505	4705	5005	5605	6005	6505
	Lift	h_3	2970	3170	3670	3970	4170	4670	4970	2970	3170	3670	3970	4170	4470	4670	4970	5570	5970	6470
	Height, mast lowered	h_1	2065	2165	2415	2615	2715	2965	3165	2065	2165	2415	2615	2715	2065	2165	2265	2465	2615	2815
	Height, mast extended	h_4	3525	3725	4225	4560	4760	5260	5560	3550	3750	4250	4550	4750	5065	5265	5565	6165	6565	7065
	Free lift	h_2	80	80	80	80	80	80	80	1480	1580	1830	2030	2130	1470	1570	1670	1870	2020	2220

Superelastic tyre			Duplex NFL							Duplex FFL					Triplex FFL					
C4D/ G150T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	1500	1500	1500	1500	1500	1450	1300	1500	1500	1500	1500	1500	1450	1450	1350	1050	800	600
C4D/ G180T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	1750	1750	1750	1700	1650	1600	1550	1750	1750	1700	1650	1650	1650	1600	1450	1250	950	600

Pneumatic tyre			Duplex NFL							Duplex FFL					Triplex FFL					
C4D/ G150T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	1500	1500	1500	1500	1500	1450	1300	1500	1500	1500	1500	1500	1400	1350	1250	950	700	500
C4D/ G180T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	1750	1750	1750	1700	1650	1600	1550	1750	1750	1700	1650	1650	1650	1600	1450	1100	900	500

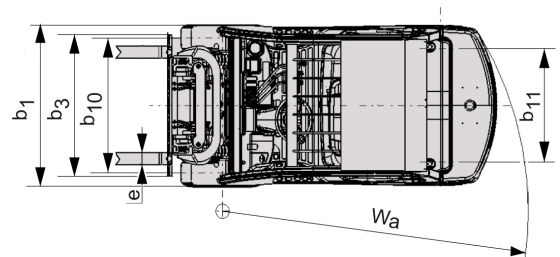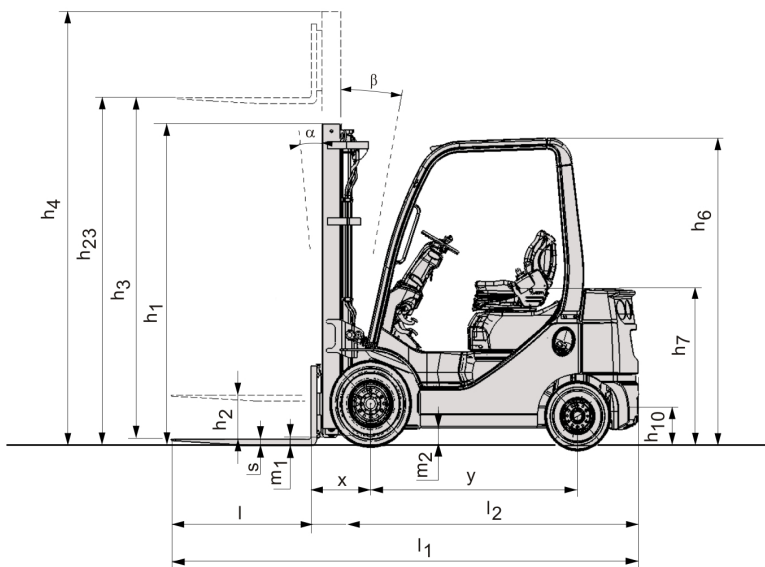

Engine Powered Forklift 2.0 - 2.5 ton

Truck specifications					C4G200T	C4D200T	C4G250T	C4D250T
Identification	1.1	Manufacturer			BT	BT	BT	BT
	1.2	Model			C4G200T	C4D200T	C4G250T	C4D250T
	1.3	Drive			LPG	Diesel	LPG	Diesel
	1.4	Operator type			Rider seated	Rider seated	Rider seated	Rider seated
	1.5	Load capacity/rated load	Q	kg	2000	2000	2500	2500
	1.6	Load centre	c	mm	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	448,5 ¹⁾	448,5 ¹⁾	487,5 ²⁾	487,5 ²⁾
	1.9	Wheelbase	y	mm	1650	1650	1650	1650
	Weight	2.1	Service weight		kg	3250	3290	3560
2.2		Axle load, with load, front/rear		kg	4580/670	4600/690	5280/780	5300/800
2.3		Axle load, without load, front/rear		kg	1410/1840	1430/1860	1300/2260	1320/2280
Tyres	3.1	Tyres: Cushion (C), Pneumatic (PN), Superelastic (SE), Dual (G)			SE-PN / SEG-PNG		SE-PN / SEG-PNG	
	3.2	Tyre size, front			7.00-12 / 7.00-12		7.00-12 / 7.00-12	
	3.3	Tyre size, rear			6.00-9	6.00-9	6.00-9	6.00-9
	3.5	Wheels, number front/rear (x=driven wheels)			2x/2/ 4x/2	2x/2/ 4x/2	2x/2/ 4x/2	2x/2/ 4x/2
	3.6	Track width, front	b ₁₀	mm	960/1190	960/1190	960/1190	960/1190
	3.7	Track width, rear	b ₁₁	mm	965	965	965	965
	Dimensions	4.1	Tilt of mast/fork carriage forward/backward		α/β	deg	6/11	6/11
4.2		Height, mast lowered		h ₁	mm	2065	2065	2115
4.3		Free lift		h ₂	mm	80	80	80
4.4		Lift		h ₃	mm	2970	2970	2970
		Lift height		h ₂₃	mm	3005	3005	3010
4.5		Height, mast extended		h ₄	mm	3525	3525	3600
4.7		Height of overhead guard (cab)		h ₆	mm	2110	2110	2110
4.8		Seat height/stand height		h ₇	mm	1060	1060	1060
4.12		Coupling height		h ₁₀	mm	315	315	315
4.19		Overall length		l ₁	mm	3542	3542	3649
4.20		Length to face of forks		l ₂	mm	2542	2542	2649
4.21		Overall width		b ₁	mm	1150/1610	1150/1610	1150/1610
4.22		Fork dimensions		s/e/l	mm	35/120/1000	35/120/1000	40/120/1000
4.23		Fork carriage DIN 15 173, class/type A, B				I/A	I/A	I/A
4.24		Fork-carriage width		b ₃	mm	1020	1020	1020
4.31		Ground clearance, with load, below mast		m ₁	mm	115	115	115
4.32		Ground clearance, centre of wheelbase		m ₂	mm	160	160	160
4.33		Aisle width for pallets 1000 x 1200 crossways		A _{st}	mm	3942	3942	4039
4.34		Aisle width for pallets 800 x 1200 lengthways		A _{st}	mm	4142	4142	4239
4.35		Turning radius		W _a	mm	2294	2294	2352
4.36	Internal turning radius		b ₁₃	mm	745	745	745	
Performance data	5.1	Travel speed, with/without load			km/h	17,5/18,0	17,0/17,5	17,5/18,0
	5.2	Lift speed, with/without load			m/s	0,60/0,64	0,56/0,60	0,60/0,64
	5.3	Lowering speed, with/without load			m/s	< 0,55	< 0,55	< 0,55
	5.5	Drawbar pull, with/without load			N	18500/9000	17900/9100	18500/8500
	5.7	Gradeability, with/without load			%	39/22	36/22	33/19
	5.10	Service brake				Hydraulic	Hydraulic	Hydraulic
Combustion engine	7.1	Engine manufacturer/type				Toyota 4Y	Toyota 1DZ-III	Toyota 4Y
	7.2	Engine power acc. to ISO 1585			kW	38	36	38
	7.3	Rated speed			1/min	2570	2500	2570
	7.4	No. of cylinders/displacement			cm ³	4/2237	4/2486	4/2237
Others	8.1	Type of drive control				Hydrodynamic	Hydrodynamic	Hydrodynamic
	8.2	Operating pressure for attachments			bar	147	147	147
	8.3	Oil volume for attachments			l/min	65-71	65-77	65-71
	8.4	Sound level at the driver's ear according to EN 12 053			dB(A)	77	79	77

1) with sidseshift: +35 mm

2) with sidseshift: +32 mm

Performance data and dimensions are nominal and subject to tolerances.

Specifications are subject to change without notice.



Please obtain the latest specifications before contracting products.

Most dimensions and rated capacities

Model			Duplex NFL							Duplex FFL					Triplex FFL							
C4D/G200T	Lift height	h_{23}	3005	3205	3705	4005	4205	4705	5005	3005	3205	3705	4005	4205	—	4495	—	4705	5005	5605	6005	6505
	Lift	h_3	2970	3170	3670	3970	4170	4670	4970	2970	3170	3670	3970	4170	—	4460	—	4670	4970	5570	5970	6470
	Height, mast lowered	h_1	2065	2165	2415	2615	2715	2965	3165	2065	2165	2415	2615	2715	—	2065	—	2165	2265	2465	2615	2815
	Height, mast extended	h_4	3525	3725	4225	4560	4760	5260	5560	3565	3765	4265	4565	4765	—	5055	—	5265	5565	6165	6565	7065
	Free lift	h_2	80	80	80	80	80	80	80	1480	1580	1830	2030	2130	—	1470	—	1570	1670	1870	2020	2220
C4D/G250T	Lift height	h_{23}	3010	3210	3710	4010	4210	4710	5010	3010	3210	3710	4010	4210	4360	—	4600	—	5010	5610	6010	6510
	Lift	h_3	2970	3170	3670	3970	4170	4670	4970	2970	3170	3670	3970	4170	4320	—	4560	—	4970	5570	5970	6470
	Height, mast lowered	h_1	2115	2215	2465	2665	2765	3015	3215	2115	2215	2465	2665	2765	2095	—	2175	—	2315	2515	2665	2865
	Height, mast extended	h_4	3600	3800	4300	4620	4820	5320	5670	3635	3835	4335	4635	4835	4985	—	5225	—	5635	6235	6635	7135
	Free lift	h_2	80	80	80	80	80	80	80	1450	1550	1800	2000	2100	1430	—	1510	—	1650	1850	2000	2200

Superelastic tyre			Duplex NFL							Duplex FFL					Triplex FFL							
C4D/G200T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	—	6	—	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	—	6	—	6	6	6	6	6
	Load capacity at 500 mm LC	kg	2000	2000	2000	2000	1950	1900	1900	2000	2000	2000	1950	1950	—	1900	—	1900	1650	1400	1000	750
C4D/G250T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	—	6	—	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	9	6	6	—	6	—	6	6	6	6
	Load capacity at 500 mm LC	kg	2500	2500	2500	2500	2400	2150	1700	2500	2500	2500	2500	2400	2500	—	2300	—	2150	1950	1050	750

Pneumatic tyre			Duplex NFL							Duplex FFL					Triplex FFL							
C4D/G200T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	—	6	—	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	—	6	—	6	6	6	6	6
	Load capacity at 500 mm LC	kg	2000	2000	2000	2000	1950	1850	1850	2000	2000	2000	1950	1950	—	1900	—	1850	1450	1200	850	650
C4D/G250T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	—	6	—	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	9	6	6	—	6	—	6	6	6	6
	Load capacity at 500 mm LC	kg	2500	2500	2500	2500	2350	2150	1700	2500	2500	2500	2500	2350	2500	—	2300	—	2000	1800	900	650

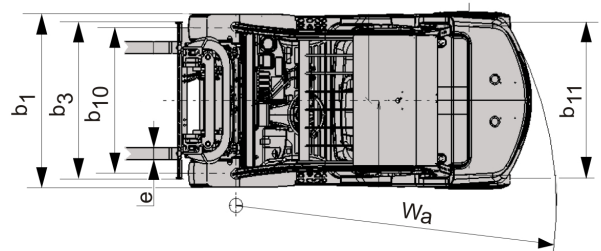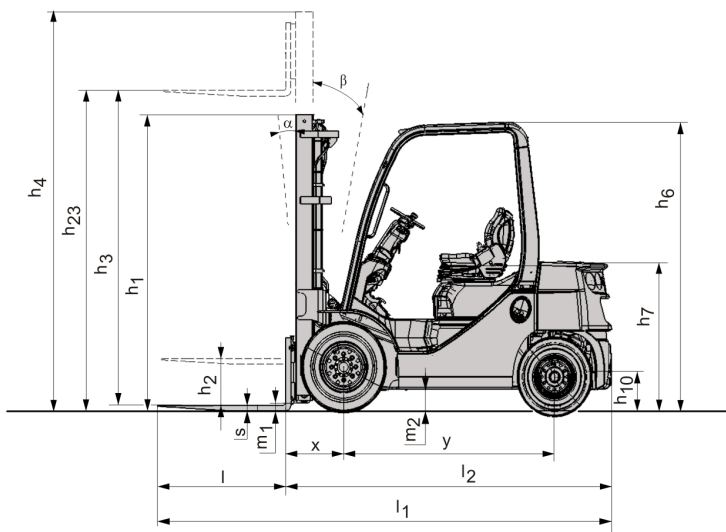

Engine Powered Forklift 3.0 - 3.5 ton

Truck specifications					C4G300T	C4D300T	C4G350T	C4D350T
Identification	1.1	Manufacturer			BT	BT	BT	BT
	1.2	Model			C4G300T	C4D300T	C4G350T	C4D350T
	1.3	Drive			LPG	Diesel	LPG	Diesel
	1.4	Operator type			Rider seated	Rider seated	Rider seated	Rider seated
	1.5	Load capacity/rated load	Q	kg	3000	3000	3500	3500
	1.6	Load centre	c	mm	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	516,5 ¹⁾	516,5 ¹⁾	521,5 ¹⁾	521,5 ¹⁾
	1.9	Wheelbase	y	mm	1700	1700	1700	1700
	Weight	2.1	Service weight		kg	4230	4270	4840
2.2		Axle load, with load, front/rear		kg	6200/1030	6230/1040	7220/1120	7260/1180
2.3		Axle load, without load, front/rear		kg	1460/2770	1500/2770	1660/3180	1700/3240
Tyres	3.1	Tyres: Cushion (C), Pneumatic (PN), Superelastic (SE), Dual (G)			SE-PN / SEG-PNG		SE-PN / SEG-PNG	
	3.2	Tyre size, front			28x9-15 / 7.00-15 (SEG) - 28x8-15 (PNG)		250x15 / 7.00-15 (SEG) - 28x8-15 (PNG)	
	3.3	Tyre size, rear			6.50-10	6.50-10	6.50-10	6.50-10
	3.5	Wheels, number front/rear (x=driven wheels)			2x/2/ 4x/2	2x/2/ 4x/2	2x/2/ 4x/2	2x/2/ 4x/2
	3.6	Track width, front	b ₁₀	mm	1010/1240	1010/1240	1060/1290	1060/1290
	3.7	Track width, rear	b ₁₁	mm	965	965	965	965
	Dimensions	4.1	Tilt of mast/fork carriage forward/backward			α/β	deg	6/11
4.2		Height, mast lowered			h ₁	mm	2130	2130
4.3		Free lift			h ₂	mm	80	80
4.4		Lift			h ₃	mm	2970	2970
		Lift height			h ₂₃	mm	3015	3015
4.5		Height, mast extended			h ₄	mm	3605	3605
4.7		Height of overhead guard (cab)			h ₆	mm	2170	2170
4.8		Seat height/stand height			h ₇	mm	1120	1120
4.12		Coupling height			h ₁₀	mm	335	335
4.19		Overall length			l ₁	mm	3807	3807
4.20		Length to face of forks			l ₂	mm	2807	2807
4.21		Overall width			b ₁	mm	1240/1670 (7.00-15) - 1665 (28x8-15)	
4.22		Fork dimensions			s/e/l	mm	45/120/1000	45/120/1000
4.23		Fork carriage DIN 15 173, class/type A, B					IIIA	IIIA
4.24		Fork-carriage width			b ₃	mm	1100	1100
4.31		Ground clearance, with load, below mast			m ₁	mm	130	130
4.32	Ground clearance, centre of wheelbase			m ₂	mm	205	205	
4.33	Aisle width for pallets 1000 x 1200 crossways			A _{st}	mm	4168	4168	
4.34	Aisle width for pallets 800 x 1200 lengthways			A _{st}	mm	4368	4368	
4.35	Turning radius			W _a	mm	2452	2452	
4.36	Internal turning radius			b ₁₃	mm	720	720	
Performance data	5.1	Travel speed, with/without load			km/h	18,5/19,0	16,0/16,5	19,0/19,5
	5.2	Lift speed, with/without load			m/s	0,51/0,55	0,44/0,47	0,43/0,45
	5.3	Lowering speed, with/without load			m/s	< 0,55	< 0,55	< 0,55
	5.5	Drawbar pull, with/without load			N	18000/10300	18400/10400	17000/10500
	5.7	Gradeability, with/without load			%	26/20	27/20	20/18
	5.10	Service brake				Hydraulic	Hydraulic	Hydraulic
Combustion engine	7.1	Engine manufacturer/type				Toyota 4Y	Toyota 1DZ-III	Toyota 4Y
	7.2	Engine power acc. to ISO 1585			kW	42	36	42
	7.3	Rated speed			1/min	2570	2500	2570
	7.4	No. of cylinders/displacement			cm ³	4/2237	4/2486	4/2237
Others	8.1	Type of drive control				Hydrodynamic	Hydrodynamic	Hydrodynamic
	8.2	Operating pressure for attachments			bar	147	147	147
	8.3	Oil volume for attachments			l/min	65-74	65-75	65-74
	8.4	Sound level at the driver's ear according to EN 12 053			dB(A)	77	79	77

1) with sideshift: +32 mm

Performance data and dimensions are nominal and subject to tolerances.

Specifications are subject to change without notice.


Please obtain the latest specifications before contracting products.

Most dimensions and rated capacities

Model			Duplex NFL								Duplex FFL				Triplex FFL						
C4D/G300T	Lift height	h_{23}	3015	3215	3715	4015	4215	4715	5015	3015	3215	3715	4015	4215	—	4515	4715	5015	5615	6015	6515
	Lift	h_3	2970	3170	3670	3970	4170	4670	4970	2970	3170	3670	3970	4170	—	4470	4670	4970	5570	5970	6470
	Height, mast lowered	h_1	2130	2230	2480	2680	2780	3030	3230	2130	2230	2480	2680	2780	—	2160	2230	2330	2530	2680	2880
	Height, mast extended	h_4	3605	3805	4305	4625	4825	5325	5675	3650	3850	4350	4650	4850	—	5150	5350	5650	6250	6650	7150
	Free lift	h_2	80	80	80	80	80	80	80	1450	1550	1800	2000	2100	—	1480	1550	1650	1850	2000	2200
C4D/G350T	Lift height	h_{23}	3020	3220	3720	4020	4220	4720	5020	3020	3220	3720	4020	4220	4370	4520	4720	5020	5620	6020	6520
	Lift	h_3	2970	3170	3670	3970	4170	4670	4970	2970	3170	3670	3970	4170	4320	4470	4670	4970	5570	5970	6470
	Height, mast lowered	h_1	2145	2345	2595	2795	2895	3145	3345	2145	2345	2595	2745	2845	2225	2275	2345	2445	2645	2795	2995
	Height, mast extended	h_4	3600	3900	4400	4700	4900	5400	5800	3650	3850	4350	4650	4850	5000	5150	5350	5650	6250	6650	7150
	Free lift	h_2	80	80	80	80	80	80	80	1450	1665	1915	2065	2165	1545	1595	1665	1765	1965	2115	2315

Superelastic tyre			Duplex NFL								Duplex FFL				Triplex FFL						
C4D/ G300T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	—	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	—	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	3000	3000	3000	3000	3000	2800	2600	3000	3000	3000	3000	3000	—	2900	2800	2650	2050	1650	1100
C4D/ G350T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	6	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	3500	3500	3500	3500	3400	3300	3200	3500	3500	3500	3500	3400	3500	3500	3250	3150	2750	2150	1100

Pneumatic tyre			Duplex NFL								Duplex FFL				Triplex FFL						
C4D/ G300T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	—	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	—	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	3000	3000	3000	3000	3000	2800	2600	3000	3000	3000	3000	3000	—	2900	2800	2550	1900	1500	1000
C4D/ G350T	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	6	6	6	11	11	11	11	6	6	6	6	6	6	6	6
	Load capacity at 500 mm LC	kg	3500	3500	3500	3500	3400	3300	3200	3500	3500	3500	3450	3400	3500	3500	3250	3150	2700	2050	1100

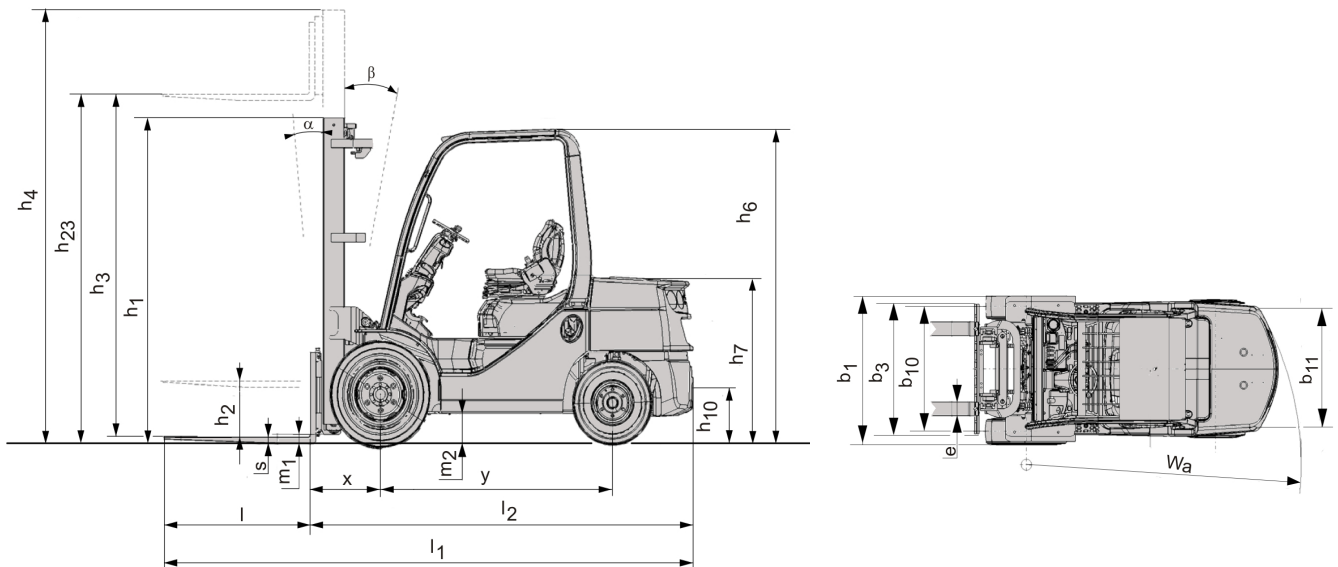

Standard equipment:

- Duplex NFL (height: 2970 mm)
- Long forks (length: 1000 mm)
- Forkbar [length: 920 mm (C4D/G150T-180T), 1020 mm (C4D/G200T-250T), 1100 mm (C4D/G300-350T)]
- 3 way valve
- Adjustable PVC seat
- Mechanical levers
- Full hydraulic power steering
- Anti-restart ignition key switch
- Foot parking brake
- Adjustable tilt steering column
- Rear lights
- Superelastic tyres



TP-Technical Publications, Sweden — 745572-040, version 3, 1301